



Game Changer XAS 950 CD

Portable Air Compressor

www.atlascopco.com

XAS 950 CD

Model		XAS 950 CD		
Normal effective working pressure	psi	200	150	100
Actual free air delivery (FAD)	CFM*	754	900	950
Working pressure range	psi (Bar)	58 - 200		
Discharge outlet quantity	#	2		
Discharge outlet size	inches	2x3/4" & 2x2"		
Minimum starting temperature	°F (°C)	-13 (-25)		


Engine		
Model	Catepillar	C 7.1
Displacement	L	7.1
Cylinders	#	6
Tier	US EPA	T4F
HP		302
Rated speed (High)	RPM	2200
Rated speed (Low)	RPM	1300
Fuel tank capacity Gal	Gal (L)	90 (340)
DEF tank capacity	Gal (L)	8.45 (32)

Unit dimensions - LxWxH		
Single axle trailer	Inches	201 x 80 x 97
Weight (Wet)	lbs (kg)	8200 (3719)
Support mounted	Inches	149 x 66.5 x 78
Weight (Wet)	lbs (kg)	TBD


Photos and illustrations contained herein might depict products with optional and/or extra components which are not included with the standard version of the product and, therefore, are not included in a purchase of such product unless the customer specifically purchases such optional/extra components. We reserve the right to change the specifications and design of products described in this literature without notice. Not all products are available in all markets.

Standard features

- Atlas Copco XC 2003 Pace
- 110% Spillage free containment frame
- PFF (Portable Full Feature) aftercooler and filters, provides ISO 8573-1.7.1 quality air
- Cold weather package
- External fuel connections

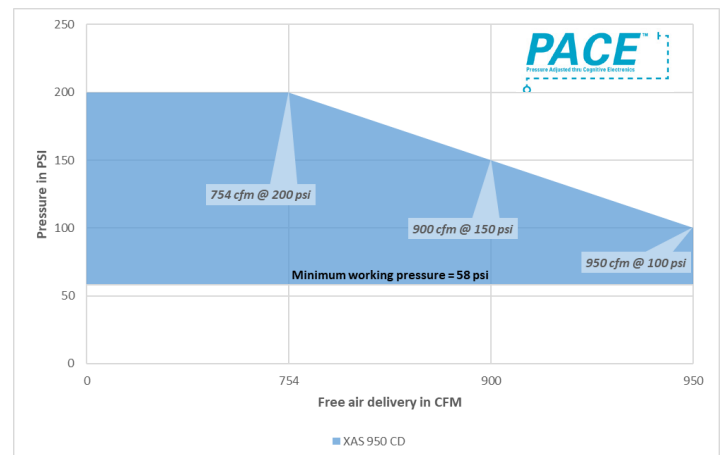

LOWER CAPITAL INVESTMENT One machine covers multiple applications	PACE TECHNOLOGY 	LOW TOTAL COST OF OWNERSHIP
COMPACT SIZE With maximum flow	UP TO 27% LIGHTER THAN THE COMPETITOR 	CORROSION RESISTANT CANOPY
UP TO 15% FUEL SAVING 	DESIGNED FOR EASY SERVICE 	CONTROL & MONITOR

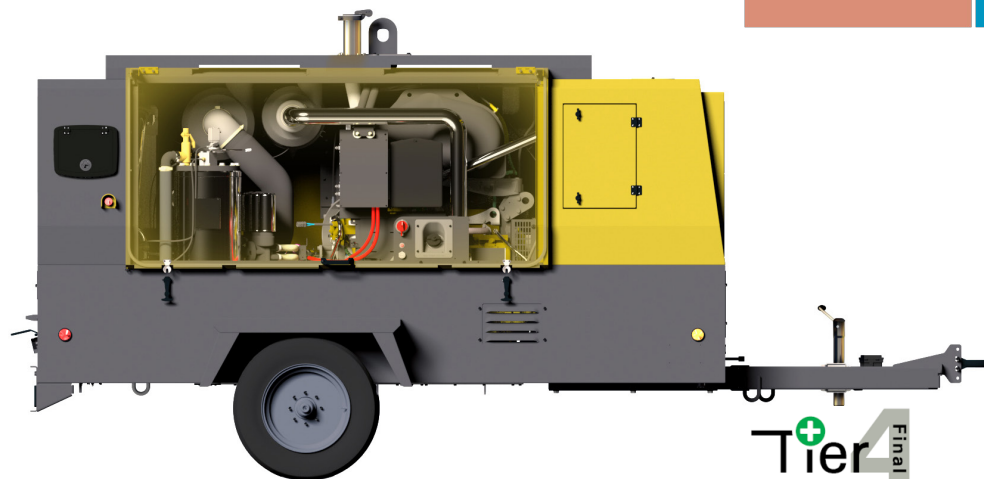

Atlas Copco

Atlas Copco
 1059 Paragon Way
 Rock Hill, SC 29730
 Phone: 800.732.6262
 atlascopco.com

Tier 4 Final